ProPEX® Engineered Plastic (EP) Swivel Closet Adapter

Submittal Information
Revision B: June 7, 2010

Project Information

Job Name:

Location: | Part No. Ordered:

Engineer: | Date Submitted:

Contractor: | Submitted By:

Manufacturer's Representative: | Approved By:

Technical Data

Nut:	Plastic
PEX Barb:	UDEL® Polysulfone, 20% glass-reinforced
Nose Cone:	EPDM
Maximum Working Temperature/Pressure:	210°F at 150 psi (99°C at 10.3 bar)
Maximum Temperature (no pressure):	320°F (160°C)

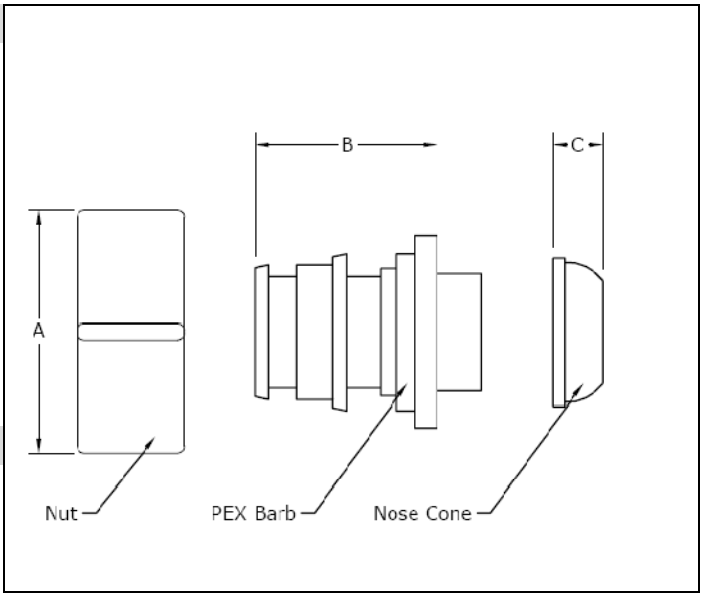

Product Information and Application Use

The ProPEX® Engineered Plastic (EP) Swivel Closet Adapters are available for use in hot and cold domestic potable water systems.[1] One end features the Uponor ProPEX Fitting for swivel connections to Uponor AquaPEX® tubing.

✓	Description	Part Number	A	B	C	Nut	Weight
☐	ProPEX EP Swivel Closet Adapter, ⅜" PEX x ⅞" Ballcock	Q4340375	1.13"	0.93"	0.43"	15/16"-14 NS-1	0.01 lbs.
☐	ProPEX EP Swivel Closet Adapter, ½" PEX x ⅞" Ballcock	Q4340500	1.13"	1.05"	0.43"	15/16"-14 NS-1	0.02 lbs.

Installation

A ProPEX Ring is required to make a ProPEX connection. Use the appropriate Uponor ProPEX Ring for tubing connections. For more information, refer to the Uponor Professional Plumbing Installation Guide.

Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

HUD MR 1269; ICC ESR 1099; ANSI/NSF 14- and 61-certified; IAPMO 3558

Related Applications

PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

[1]ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.