EP Valveless Manifold

Submittal Information
Revision A: March 17, 2010

Project Information

Job Name:

Location: | Part No. Ordered:

Engineer: | Date Submitted:

Contractor: | Submitted By:

Manufacturer's Representative: | Approved By:

Technical Data

Material:	Acudel® modified polyphenylsulfone
Maximum Temperature (no pressure):	320°F (160°C)
Maximum Working Temperature/Pressure:	210°F at 150 psi (104°C at 10.3 bar)
Flow at 5 fps:	15.0 gpm
Flow at 8 fps:	31.0 gpm

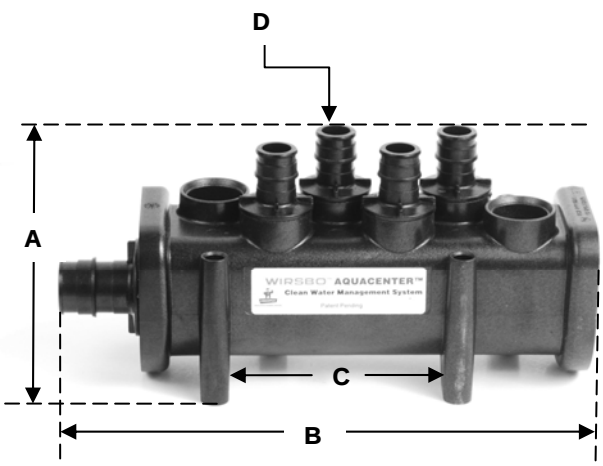

Product Information and Application Use

Uponor's Engineered Plastic (EP) Valveless Manifolds feature ½" ProPEX® outlets for easy connections.[1] Designed to eliminate the need for torches, glues or gauges, the manifold is available with 4, 6, or 8 ProPEX outlets. The manifolds may be concealed in walls, ceilings and floors because ProPEX Fittings are a manufactured connection.

✓	Description	Part Number	A	B	C	D	Width	Weight
☐	EP Valveless Manifold, 4 outlets, ¾" ProPEX	Q2200400	3.90"	07.366"	2.950"	½" ProPEX	2.55"	0.74 lbs.
☐	EP Valveless Manifold, 6 outlets, ¾" ProPEX	Q2200600	3.90"	07.465"	2.950"	½" ProPEX	2.55"	0.80 lbs.
☐	EP Valveless Manifold, 8 outlets, 1" ProPEX	Q2210800	3.90"	12.708"	6.325"	½" ProPEX	2.55"	1.20 lbs.

Installation

Any bend within six inches of the ProPEX connection to the manifold requires the use of a Tube Talon or Bend Support. Refer to the Uponor Professional Plumbing Installation Guide for further instructions.

Standards

CAN/CSA B137.5; ASTM F877; ASTM F1960

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

HUD MR 1269; ICC ESR 1099; ANSI/NSF 14- and 61-certified

Related Applications

PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
2000 Argentia Rd., Plaza 1, Ste. 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

[1]ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.