# ProPEX® Ball Valve



Submittal Information Revision B: March 11, 2011

# **Project Information**

Job Name:


300 Harrier			
Location:	Part No. Ordered:		
Engineer:	Date Submitted:		
Contractor:	Submitted By:		
Manufacturer's Representative:	Approved By:		

#### **Technical Data**

Material: CA 360 Brass

Maximum Temperature (no pressure): 250°F (121°C)

Maximum Working Pressure: 125 psi

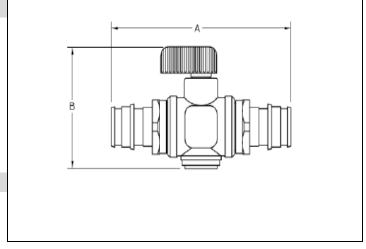

## **Product Information and Application Use**

The Uponor ProPEX® Ball Valve is used in plumbing and radiant heating applications.¹ Both ends are manufactured with the ProPEX fittings for making connections to Uponor AquaPEX® tubing or Wirsbo hePEX™ tubing.

✓ Description	Part Number	A	В	Weight
ProPEX Ball Valve (0.44" bore), ½" PEX x ½" PEX ProPEX Ball Valve (large bore), ¾" PEX x ¾" PEX ProPEX Valve (small bore), ½" PEX x ½" PEX	Q4915050	2.80"	1.60"	0.30 lbs.
	Q4917575	3.00"	2.00"	0.30 lbs.
	O4945050	3.00"	2.00"	0.50 lbs.

### Installation

Install valve according to local building code. Do not dismantle. Refer to the Uponor AquaPEX Professional Plumbing Installation Guide or the Uponor Radiant Installation Handbook for additional information.

#### **Standards**

CSA B137.5 and B125; ASTM F877; ASTM F1960

### **Codes**

IPC; UPC; NSPC; NPC of Canada

### Listings

ANSI/NSF 61/9

Related Applications	Contact Information
PEX-a Plumbing Systems Radiant Heating and Cooling Systems	Uponor Ltd. 2000 Argentia Road, Plaza 1, Suite 200 Mississauga, ON L5N 1W1 CANADA Phone: (888) 994-7726 Fax: (800) 638-9517 www.uponor.ca

 $<sup>^1\</sup>text{ProPEX}^{\$}$  is a registered trademark of Uponor, Inc.  $\text{ProPEX}^{\intercal}$  is a trademark of Uponor Ltd.