

Three-zone Multi-pump Relay

Submittal Information
Revision A: May 15, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Transformer: 120VAC input, 24VAC (10 VA rating)
Maximum Combined Load: 7.2 A
Ambient Conditions: Indoor use only, 32°F (0°C) to 122°F (50°C)
Maximum Zones: 3 with priority

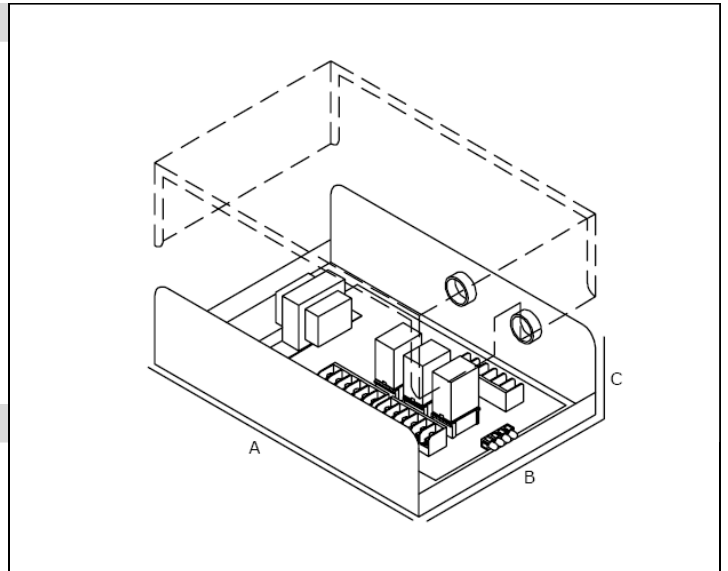

Product Information and Application Use

The Three-zone Multi-pump Relay controls the operation of up to three pumps or circulators from dedicated 24-volt signals. The relay includes secondary low-voltage terminals for boiler operation and DHW priority options.

✓ Description

Three-zone Multi-pump Relay

Part Number	A	B	C	Weight
A3080301	10.25"	6.63"	2.75"	5.0 lbs.

Installation

Connect the thermostat to the "T T" terminals on the switching relay. When the thermostat calls for heat, the boiler is given a signal to start. The appropriate circulator is only energized when the boiler is above the set low limit. Refer to the Uponor Three-zone Multi-pump Relay Instruction Sheet for additional information.

Standards

N/A

Codes

N/A

Listings

N/A

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca