Uponor Logic for Fire Safety means you can install peace of mind with peace of mind.





- State-of-the-art systems
- Reliability
- Faster installations
- Fewer connections
- Meets or exceeds code requirements
- · Peace of mind

AQUASAFE® Network and AQUASAFE Looped Systems

Now you have two great fire sprinkler installation-design options, AQUASAFE® Network and AQUASAFE Looped. Both designs have fewer fittings and fewer leak points than other systems. The Uponor sprinkler

system is integrated into the home's plumbing system so it circulates fresh water so the sprinkler system is tested each time a fixture is used.

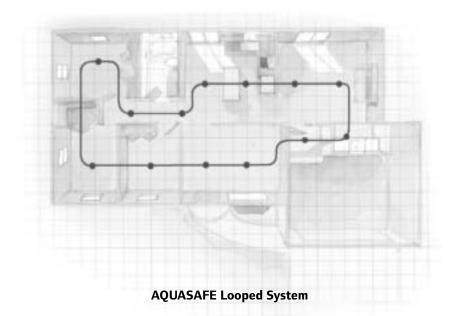

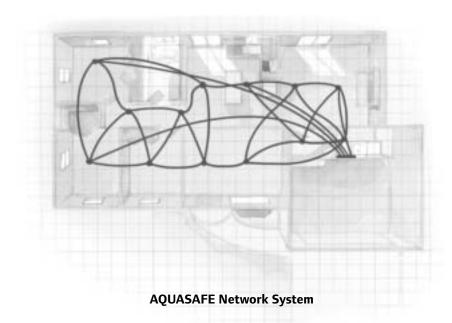

Uponor AquaPEX Non-barrier Tubing

Uponor AquaPEX tubing is used primarily in hot and cold potable water distribution systems and AQUASAFE Residential Fire Safety Systems.

Uponor AquaPEX tubing is manufactured and listed to ASTM F876 and F877 and certified to NSF Standards 14 and 61. Uponor AquaPEX tubing is rated and listed by the Hydrostatic Stress Board of PPI at 200°F at 80 psi, 180°F at 100 psi and 73.4°F at 160 psi.

Note: Uponor's $\frac{1}{2}$ ", $\frac{3}{4}$ " and 1" Uponor AquaPEX tubing is listed to UL 1821 and ULC/ORD C199P and carries an additional rating of 120°F at 130 psi.

Part No.	Part Description	Coil/Pallet	List Price/Ea.
F1040500	½" Uponor AquaPEX White, 100-ft. coil	22	\$65.45
F1060500	½" Uponor AquaPEX White, 300-ft. coil	18	\$196.30
F1120500	½" Uponor AquaPEX White, 1,000-ft. coil	8	\$654.45
F1040750	3/4" Uponor AquaPEX White, 100-ft. coil	11	\$112.20
F1060750	3/4" Uponor AquaPEX White, 300-ft. coil	12	\$336.55
F1100750	3/4" Uponor AquaPEX White, 500-ft. coil	8	\$560.95
F1041000	1" Uponor AquaPEX White, 100-ft. coil	12	\$196.30
F1061000	1" Uponor AquaPEX White, 300-ft. coil	5	\$589.00
F1101000	1" Uponor AquaPEX White, 500-ft. coil	6	\$981.65

Uponor AquaPEX Tubing Coil — White



Part No.	Part Description	List Price/Ea.
F1930750	3/4" Uponor AquaPEX White, 20-ft. straight length, 300 ft.	\$336.55
F1921000	1" Uponor AquaPEX White, 20-ft. straight length, 200 ft.	\$392.70

Uponor AquaPEX Tubing Straight Length — White



A ProPEX Ring is required to make a proper ProPEX connection. Rings are listed to UL 1821 and ULC/ORD C199P.

	Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
W	Q4690512	ProPEX Ring with Stop, 1/2"	50	2,000	\$0.17
W	Q4690756	ProPEX Ring with Stop, ¾"	50	1,000	\$0.30
	Q4681000	ProPEX Ring 1"	50	500	\$0.50

ProPEX Ring



Residential Fire Sprinklers

The Concealed Sprinkler threads onto Uponor's fire sprinkler adapter fitting. All sprinklers come complete with a plastic protective cap and cup. Sprinklers are NSF- and UL-approved for combined plumbing and sprinkler systems.

Note: Concealed Cover Plates sold separately. Do not store sprinkler assemblies where the ambient temperature will exceed 100°F. RFC or CCP sprinkler wrench required to assemble sprinkler adapter.

	Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
¥	Q73000CP	R1/Res 30 CCP (155°F) Domed Concealed Sprinkler	5	25	\$30.00
	Q74300BR	RFC43 (165°F) Flat Concealed Sprinkler	5	25	\$45.00
¥	Q74900FC	RFC49 (165°F) Flat Concealed Sprinkler	5	25	\$45.00
	Q74900CP	F1/Res 49 CCP (155°F) Domed Concealed Sprinkler	5	25	\$30.00

Concealed Sprinkler



Recessed Pendent Sprinkler



The Recessed Pendent Sprinkler threads onto Uponor's fire sprinkler adapter fitting. Sprinklers are NSF-and UL-approved for combined plumbing and sprinkler systems.

Note: Protective plastic caps and escutcheons sold separately. Do not store sprinkler assemblies where the ambient temperature will exceed 100°F. Recessed Sprinkler Wrench required to assemble sprinkler adapter.

	Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
NEW TOTAL	Q73000WH	F1/Res 30 (155°F) Recessed Pendent Sprinkler, White	5	25	\$30.00
TO	Q73000BR	F1/Res 30 (155°F) Recessed Pendent Sprinkler, Bronze	5	25	\$30.00
TO	Q73001WH	F1/Res 30 (175°F) Recessed Pendent Sprinkler, White*	5	25	\$30.00
TO	Q73001BR	F1/Res 30 (175°F) Recessed Pendent Sprinkler, Bronze*	5	25	\$30.00
	Q74900WH	F1/Res 49 (155°F) Recessed Pendent Sprinkler, White	5	25	\$30.00
	Q74900BR	F1/Res 49 (155°F) Recessed Pendent Sprinkler, Bronze	5	25	\$30.00
	Q74901WH	F1/Res 49 (175°F) Recessed Pendent Sprinkler, White*	5	25	\$30.00
	Q74901BR	F1/Res 49 (175°F) Recessed Pendent Sprinkler, Bronze*	5	25	\$30.00

^{*}Use 175°F sprinklers where the maximum ambient ceiling temperatures are between 101°F and 150°F.

Special Finishes: Chrome-plated, satin chrome, bright brass, black-plated, black-painted and off-white (Contact Uponor for extended delivery time and additional costs associated with special finishes.)

Recessed Horizontal Sidewall Sprinkler



The Recessed Horizontal Sidewall Sprinkler threads onto Uponor's fire sprinkler adapter fitting. Sprinklers are NSF- and UL-approved for combined plumbing and sprinkler systems.

Note: Protective plastic caps and escutcheons sold separately. Do not store sprinkler assemblies where the ambient temperature will exceed 100°F. Recessed Sprinkler Wrench required to assemble sprinkler adapter.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q74400WH	F1/Res 44 (155°F) Recessed Horizontal Sidewall Sprinkler, White	5	25	\$30.00
Q74400BR	F1/Res 44 (155°F) Recessed Horizontal Sidewall Sprinkler, Bronze	5	25	\$30.00
Q74401WH	F1/Res 44 (175°F) Recessed Horizontal Sidewall Sprinkler, White*	5	25	\$30.00
Q74401BR	F1/Res 44 (175°F) Recessed Horizontal Sidewall Sprinkler, Bronze*	5	25	\$30.00

^{*}Use 175°F sprinklers where the maximum ambient ceiling temperatures are between 101°F and 150°F.

Special Finishes: Chrome-plated, satin chrome, bright brass, black-plated, black-painted and off-white (Contact Uponor for extended delivery time and additional costs associated with special finishes.)

Sprinkler Assemblies

Recessed Pendent Sprinkler Assembly



The Recessed Pendent Sprinkler Assembly comes with the sprinkler threaded onto the stainless steel multi-port fitting with ProPEX outlets. All assemblies come complete with a protective plastic cap and escutcheon. Sprinkler assemblies are NSF- and UL-approved for combined plumbing and sprinkler systems.

Note: Do not store sprinkler assemblies where the ambient temperature will exceed 100°F.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q74955WH	F1/Res 49 (155°F) Recessed Pendent Sprinkler Assembly, White	5	25	\$75.00
Q74955BR	F1/Res 49 (155°F) Recessed Pendent Sprinkler Assembly, Bronze	5	25	\$85.00
Q74975WH	F1/Res 49 (175°F) Recessed Pendent Sprinkler Assembly, White*	5	25	\$80.00
Q74975BR	F1/Res 49 (175°F) Recessed Pendent Sprinkler Assembly, Bronze*	5	25	\$85.00

^{*}Use 175°F sprinklers where the maximum ambient ceiling temperatures are between 101°F and 150°F.

Special Finishes: Chrome-plated, satin chrome, bright brass, black-plated, black-painted and off-white (Contact Uponor for extended delivery time and additional costs associated with special finishes.)

The Recessed Horizontal Sidewall Sprinkler Assembly comes with the sprinkler threaded onto the stainless steel multi-port fitting with ProPEX outlets. All assemblies come complete with a protective plastic cap and escutcheon. Sprinkler assemblies are NSF- and UL-approved for combined plumbing and sprinkler systems.

Note: Do not store sprinkler assemblies where the ambient temperature will exceed 100°F.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q74455WH	F1/Res 44 (155°F) Recessed Horizontal Sidewall Sprinkler Assembly, White	5	25	\$75.00
Q74455BR	F1/Res 44 (155°F) Recessed Horizontal Sidewall Sprinkler Assembly, Bronze	5	25	\$85.00
Q74475WH	F1/Res 44 (175°F) Recessed Horizontal Sidewall Sprinkler Assembly, White*	5	25	\$80.00
Q74475BR	F1/Res 44 (175°F) Recessed Horizontal Sidewall Sprinkler Assembly, Bronze*	5	25	\$85.00

^{*}Use 175°F sprinklers where the maximum ambient ceiling temperatures are between 101°F and 150°F.

Special Finishes: Chrome-plated, satin chrome, bright brass, black-plated, black-painted and off-white (Contact Uponor for extended delivery time and additional costs associated with special finishes.)

Recessed Horizontal Sidewall Sprinkler Assembly



The Concealed Sprinkler Assembly comes with the sprinkler threaded onto Uponor's stainless steel multi-port fitting with ProPEX outlets. All assemblies come complete with a plastic protective cap and cup. Sprinkler assemblies are NSF- and UL-approved for combined plumbing and sprinkler systems.

Note: Concealed Cover Plates sold separately. Do not store sprinkler assemblies where the ambient temperature will exceed 100°F.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q74355CP	RFC43 (165°F) Flat Concealed Sprinkler Assembly	5	25	\$82.75
Q74955CP	F1/Res 49 CCP (155°F) Domed Concealed Sprinkler Assembly	5	25	\$85.00

Concealed Sprinkler Assembly



Sprinkler Cabinets

This three-sprinkler cabinet allows installers to leave spare sprinklers in the home.

Note: Ensure extra sprinklers of each type used in the home are purchased separately and included in the cabinet.

Part No.	Part Description	Each Qty.	Pkg. Qty.	List Price/Ea.
Q75049WH	Cabinet with Three F1/Res 49 (155°F) Pendent Sprinklers, White	1	-	\$160.00
Q75049BR	Cabinet with Three F1/Res 49 (155°F) Pendent Sprinklers, Bronze	1	-	\$160.00
Q75043CP	Cabinet with Three RFC43 (165°F) Concealed Sprinklers, Bronze	1	-	\$200.00
Q75044WH	Cabinet with Three F1/Res 44 (155°F) Horizontal Sidewall Sprinklers, White	1	-	\$160.00
Q75044BR	Cabinet with Three F1/Res 44 (155°F) Horizontal Sidewall Sprinklers, Bronze	1	-	\$160.00
Q7503000	Sprinkler Cabinet without Sprinklers	1	-	\$ 73.00

Sprinkler Cabinet



◀ Discontinued item; available while quantities last. Please contact Uponor Customer Service for availability. All sales are final.

Sprinkler Accessories

Concealed Flat Cover Plate



The Concealed Flat Cover Plate easily slides onto the RFC Concealed Sprinkler Assembly for a finished appearance. The flat cover plate completely hides the sprinkler from view. All cover plates detach from the sprinkler assembly when temperatures reach 135°F.

Note: Do not store cover plates in areas where the ambient temperature will exceed 100°F. Cover plate must be used with the RFC43 or RFC49 concealed sprinkler. Custom-painted cover plates are available upon request. Contact Uponor for pricing and shipping turnaround times.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q70643WH	Concealed Flat Cover Plate, White	5	25	\$23.00
Q70643BL	Concealed Flat Cover Plate, Black	5	25	\$40.00
Q70643CH	Concealed Flat Cover Plate, Chrome	5	25	\$40.00
Q70643BB	Concealed Flat Cover Plate, Bright Brass	5	25	\$40.00

Concealed Domed Cover Plate



The Concealed Domed Cover Plate easily slides onto the CCP Domed Concealed Sprinkler for a finished appearance. The cover plate completely hides the sprinkler from view. All cover plates detach from the sprinkler assembly when temperatures reach 135°F.

Note: Do not store cover plates in areas where the ambient temperature will exceed 100°F. Cover plate must be used with the concealed assembly. Custom-painted cover plates are available upon request. Contact Uponor for pricing and shipping turnaround times.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q70601WH	Concealed Domed Cover Plate, White	5	25	\$21.50
Q70601BL	Concealed Domed Cover Plate, Black	5	25	\$40.00
Q70601BR	Concealed Domed Cover Plate, Bronze	5	25	\$40.00
Q70601CH	Concealed Domed Cover Plate, Chrome	5	25	\$40.00
Q70601BB	Concealed Domed Cover Plate, Bright Brass	5	25	\$40.00

Recessed Escutcheon



Recessed Escutcheon provides a finished appearance. It comes complete with a tension collar, and is available in white or brass.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q71801WH	½" Recessed Escutcheon, White	25	100	\$7.50
Q71801BR	½" Recessed Escutcheon, Brass	25	100	\$12.00

Special Finishes: Chrome-plated, satin chrome, bright brass, black-plated, black-painted and off-white (Contact Uponor for extended delivery time and additional costs associated with special finishes.)

Concealed Sprinkler Wrench for RFC (Flat Cover Plate)



This specially designed wrench quickly and easily allows access to service flat plate (RFC) concealed sprinklers.

Part No.	Part Description	Each Qty.	Pkg. Qty.	List Price/Ea.
Q7500300	Concealed Sprinkler Wrench for RFC43 or RFC49, Flat Cover Plate	1	-	\$160.00

This specially designed Concealed Sprinkler Wrench quickly and easily allows access to service Domed Concealed Sprinklers.

Part No.Part DescriptionEach Qty.Pkg. Qty.List Price/Ea.Q7500100Concealed Sprinkler Wrench for CCP (Domed Cover Plate)1-\$160.00

Concealed Sprinkler Wrench for CCP (Domed Cover Plate)



This specially designed Recessed Sprinkler Wrench quickly and easily allows access to service Recessed Sprinklers.

Part No.	Part Description	Each Qty.	Pkg. Qty.	List Price/Ea.
Q7500200	Recessed Sprinkler Wrench	1	-	\$160.00

Recessed Sprinkler Wrench



The Concealed Protective Cap (plastic) protects RFC or CCP sprinklers from dust, paint and other hazards that might damage the sprinkler during the finishing work. Remove the cap after all finishing work is complete.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q7060050	Concealed Protective Cap, spare part	25	100	\$2.50

Concealed Protective Cap



The Recessed Protective Cap (plastic) protects the sprinklers from dust, paint and other hazards that might damage the sprinkler during the finishing work. Remove the cap after all finishing work is complete.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q7160050	Recessed Protective Cap, spare part	25	100	\$2.50

Recessed Protective Cap



Sprinkler Adapters, Manifolds and Fittings

The ProPEX Fire Sprinkler Adapter provides connection of residential fire sprinkler to Uponor AquaPEX tubing. Made of stainless steel with ProPEX outlets, the ProPEX Fire Sprinkler Adapter is NSF- and ULapproved for combined plumbing and fire sprinkler systems.

Note: ProPEX Tool is required. ProPEX Rings sold separately. Sprinkler wrench required.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q7517550	ProPEX Fire Sprinkler Adapter, ¾" PEX x ½" FNPT	5	25	\$ 54.00
Q7511050	ProPEX Fire Sprinkler Adapter, 1" PEX x ½" FNPT	5	25	\$ 55.00
Q7527575	ProPEX Fire Sprinkler Adapter Tee, ¾" PEX x ¾" PEX x ½" FNPT	5	25	\$ 58.00
Q7521010	ProPEX Fire Sprinkler Adapter Tee, 1" PEX x 1" PEX x ½" FNPT	5	25	\$ 63.00
Q7537550	ProPEX Fire Sprinkler Adapter Right Elbow, ¾" PEX x ½" FNPT	5	25	\$ 55.00
Q7531050	ProPEX Fire Sprinkler Adapter Right Elbow, 1" PEX x ½" FNPT	5	25	\$ 59.00
Q7547550	ProPEX Fire Sprinkler Adapter Left Elbow, ¾" PEX x ½" FNPT	5	25	\$ 55.00
Q7541050	ProPEX Fire Sprinkler Adapter Left Elbow, 1" PEX x ½" FNPT	5	25	\$ 59.00

ProPEX Fire Sprinkler Adapter



ProPEX 1" (type L) Copper Branch Manifold



ProPEX 1" Copper Branch Manifold has ½" ProPEX outlets brazed to manifold trunk. Sweat manifolds together to create the desired number of outlets. Do not exceed acceptable flow rates for 1" nominal copper.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

Part No.	Part Description	Each Qty.	Pkg. Qty.	List Price/Ea.
Q2801050	ProPEX 1" Copper Branch Manifold with ½" ProPEX outlets, 4 outlets	1	-	\$44.40
Q2811050	ProPEX 1" Copper Branch Manifold with ½" ProPEX outlets, 6 outlets	1	-	\$60.10
Q2821050	ProPEX 1" Copper Branch Manifold with ½" ProPEX outlets, 8 outlets	1	-	\$75.70
Q2831050	ProPEX 1" Copper Branch Manifold with ½" ProPEX outlets, 10 outlets	1	-	\$94.70
Q2841050	ProPEX 1" Copper Branch Manifold with ½" ProPEX outlets, 12 outlets	1	-	\$115.60

ProPEX Brass Coupling



ProPEX Brass Coupling makes PEX-to-PEX connections.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q4545050	ProPEX Brass Coupling, ½" PEX x ½" PEX	25	100	\$2.70
Q4547575	ProPEX Brass Coupling, ¾" PEX x ¾" PEX	25	100	\$5.65
Q4547510	ProPEX Brass Coupling, ¾" PEX x 1" PEX	10	100	\$9.60
Q4541010	ProPEX Brass Coupling, 1" PEX x 1" PEX	10	100	\$10.00

ProPEX Brass Elbow



ProPEX Brass Elbow makes tight 90-degree connections for Uponor AquaPEX tubing in supply and return mains.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q4710500	ProPEX Brass Elbow, ½" PEX x ½" PEX	25	100	\$4.55
Q4710750	ProPEX Brass Elbow, ¾" PEX x ¾" PEX	25	100	\$6.75
Q4711000	ProPEX Brass Elbow, 1" PEX x 1" PEX	10	100	\$11.15

ProPEX Brass Tee



ProPEX Brass Tee makes diverting connections for Uponor AquaPEX tubing in supply and return mains. Branch size is listed last in the part description.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q4705050	ProPEX Brass Tee, ½" PEX x ½" PEX x ½" PEX	25	100	\$5.55
Q4707575	ProPEX Brass Tee, ¾" PEX x ¾" PEX x ¾" PEX	25	100	\$8.95
Q4701010	ProPEX Brass Tee, 1" PEX x 1" PEX x 1" PEX	10	100	\$16.70

Branch size is listed last in the part description.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q4707550	ProPEX Brass Reducing Tee, ¾" PEX x ¾" PEX x ½" PEX	25	100	\$8.85
Q4707710	ProPEX Brass Reducing Tee, ¾" PEX x ¾" PEX x 1" PEX	10	100	\$14.30
Q4701775	ProPEX Brass Reducing Tee, 1" PEX x ¾" PEX x ¾" PEX	10	100	\$16.70
Q4701751	ProPEX Brass Reducing Tee, 1" PEX x ¾" PEX x 1" PEX	10	100	\$16.70
Q4701150	ProPEX Brass Reducing Tee, 1" PEX x 1" PEX x ½" PEX	10	100	\$16.70
Q4701175	ProPEX Brass Reducing Tee, 1" PEX x 1" PEX x 3/4" PEX	10	100	\$16.70

ProPEX Brass Reducing Tee



ProPEX Brass Male Threaded Adapter connects Uponor AquaPEX tubing to male NPT threads and intended as transition fittings from metal to PEX.

Note: ProPEX tool is required. ProPEX Rings sold separately.

	Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
LF ◀	Q4527575	ProPEX Brass Male Threaded Adapter, ¾" PEX x ¾" NPT	25	100	\$5.35
LF 🖣	Q4521010	ProPEX Brass Male Threaded Adapter, 1" PEX x 1" NPT	10	100	\$10.70

ProPEX Brass Male Threaded Adapter



ProPEX Brass Female Threaded Adapter connects Uponor AquaPEX tubing to female NPT threads and intended as transition fittings from metal to PEX.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

LF 4

Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
Q4577575	ProPEX Brass Female Threaded Adapter, ¾" PEX x ¾" NPT	25	100	\$6.90

ProPEX Brass Female Threaded Adapter



ProPEX Brass Sweat Adapter transitions Uponor AquaPEX tubing to copper pipe.

Note: ProPEX Tool is required. ProPEX Rings sold separately.

	Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
LF 《	Q4517575	ProPEX Brass Sweat Adapter, ¾" PEX x ¾" Copper	25	100	\$4.90
LF ◀	Q4511010	ProPEX Brass Sweat Adapter, 1" PEX x 1" Copper	10	100	\$7.60

ProPEX Brass Sweat Adapter



Test Equipment

In-line Flow Test Kit



The In-line Flow Test Kit performs a flow test to ensure proper system operation and flow. The kit contains two straight lengths of ¾" Uponor AquaPEX tubing, five test orifices, a 1" ball valve, a flow meter, assorted hardware, and assembly and installation instructions.

Note: Perform a flow test on every system installed to ensure consistency with the system design.

Part No.	Part Description	Each Qty.	Pkg. Qty.	List Price/Ea.
Q7602000	In-line Flow Test Kit	1	-	\$500.00
Q7602001	In-line Flow Meter, replacement part	1	-	\$350.00

Test Orifice



The Test Orifice is attached to the end of the PEX connector on the In-line Flow Test Kit. Use the appropriate orifice, as sprinklers vary in orifice size.

Note: Test orifices are color-coded for easy identification.

		4	٣.
4	W	۸	×

	Part No.	Part Description	Pkg. Qty.	Case Qty.	List Price/Ea.
¥	Q7500030	Test Orifice for F1/Res 30 Sprinkler, 3.0 K-factor	5	25	\$25.00
	Q7500040	Test Orifice for F1/Res 40 Sprinkler, 4.0 K-factor	5	25	\$25.00
	Q7500049	Test Orifice for F1/Res 49 or RFC 49 Sprinkler, 4.9 K-factor	5	25	\$25.00
	Q7500043	Test Orifice for RFC 43 Sprinkler, 4.3 K-factor	5	25	\$25.00
	Q7500044	Test Orifice for F1/Res 44 Sprinkler, 4.4 K-factor	5	25	\$25.00