

Wirsbo AQUAPEX® plus — Blue Tubing Coil

Submittal Information Revision A: April 21, 2008

Project Information

Job Name:

Location:	Part No. Ordered:	
Engineer:	Date Submitted:	
Contractor:	Submitted By:	
Manufacturer's Representative:	Approved By:	

Technical Data

Material: Crosslinked polyethylene


PEX-a Engel Method

Standard Grade Hydrostatic Ratings (PPI):

200°F (93°C) at 80 psi 180°F (82°C) at 100 psi

73.4°F (23°C) at 160 psi

Linear Expansion Rate: 1.10"/10°F (12°C)/100'

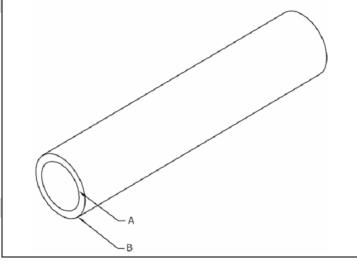

Product Information and Application Use

Wirsbo AQUAPEX® plus tubing is used primarily in hot and cold potable water distribution systems and AQUASAFE® Residential Fire Safety Systems.

✓ Description	Part Number	Α	В	Weight
½" Wirsbo AQUAPEX plus tubing — Blue, 100-ft. coil ½" Wirsbo AQUAPEX plus tubing — Blue, 300-ft. coil	F3040500	0.475"	0.625"	6.0 lbs.
	F3060500	0.475"	0.625"	18.0 lbs.
1/2" Wirsbo AQUAPEX plus tubing — Blue, 1,000-ft. coil	F3120500	0.475"	0.625"	54.0 lbs.
3/4" Wirsbo AQUAPEX plus tubing — Blue, 100-ft. coil	F3040750	0.671"	0.875"	10.0 lbs.
3/4" Wirsbo AQUAPEX plus tubing — Blue, 300-ft. coil	F3060750	0.671"	0.875"	34.0 lbs.
3/4" Wirsbo AQUAPEX plus tubing — Blue, 500-ft. coil	F3100750	0.671"	0.875"	54.0 lbs.
1" Wirsbo AQUAPEX plus tubing — Blue, 100-ft. coil	F3041000	0.862"	1.125"	20.0 lbs.
1" Wirsbo AQUAPEX plus tubing — Blue, 300-ft. coil	F3061000	0.862"	1.125"	56.0 lbs.
1" Wirsbo AQUAPEX plus tubing — Blue, 500-ft. coil	F3101000	0.862"	1.125"	93.0 lbs.

Installation

Approved fittings systems are ProPEX® and APR.¹ Refer to the AQUAPEX Professional Plumbing Installation Handbook, the AQUASAFE Network System Installation Guide or AQUASAFE Looped System Installation Guide for additional information.

Standards

CSA B137.5; ASTM F876; ASTM F877; ASTM F1960; ASTM-E84; ASTM-E119/UL 263

Codes

IPC; UPC; NSPC; NPC of Canada

Listings

IAPMO; CSA; HUD; WARNOCK HERSEY; NSF; ITS; UL; ICC; ANSI/NSF 14- and 61-certified; CAN/ULC S102.2; U.S.: ¾" diameter and smaller; Canada: 1" diameter and smaller

Contact Information Related Applications PEX-a Plumbing Systems Uponor, Inc. Uponor Ltd. 5925 148th Street West AQUASAFE Residential Fire Safety Systems 655 Park Street Regina, SK S4N 5N1 CANADA Apple Valley, MN 55124 USA Phone: (800) 321-4739 Phone: (888) 994-7726 Fax: (952) 891-2008 Fax: (800) 638-9517 www.uponor-usa.com www.uponor.ca

¹ProPEX[®] is a registered trademark of Uponor, Inc. ProPEX[™] is a trademark of Uponor Ltd.